

[illegible]

FIG. 2

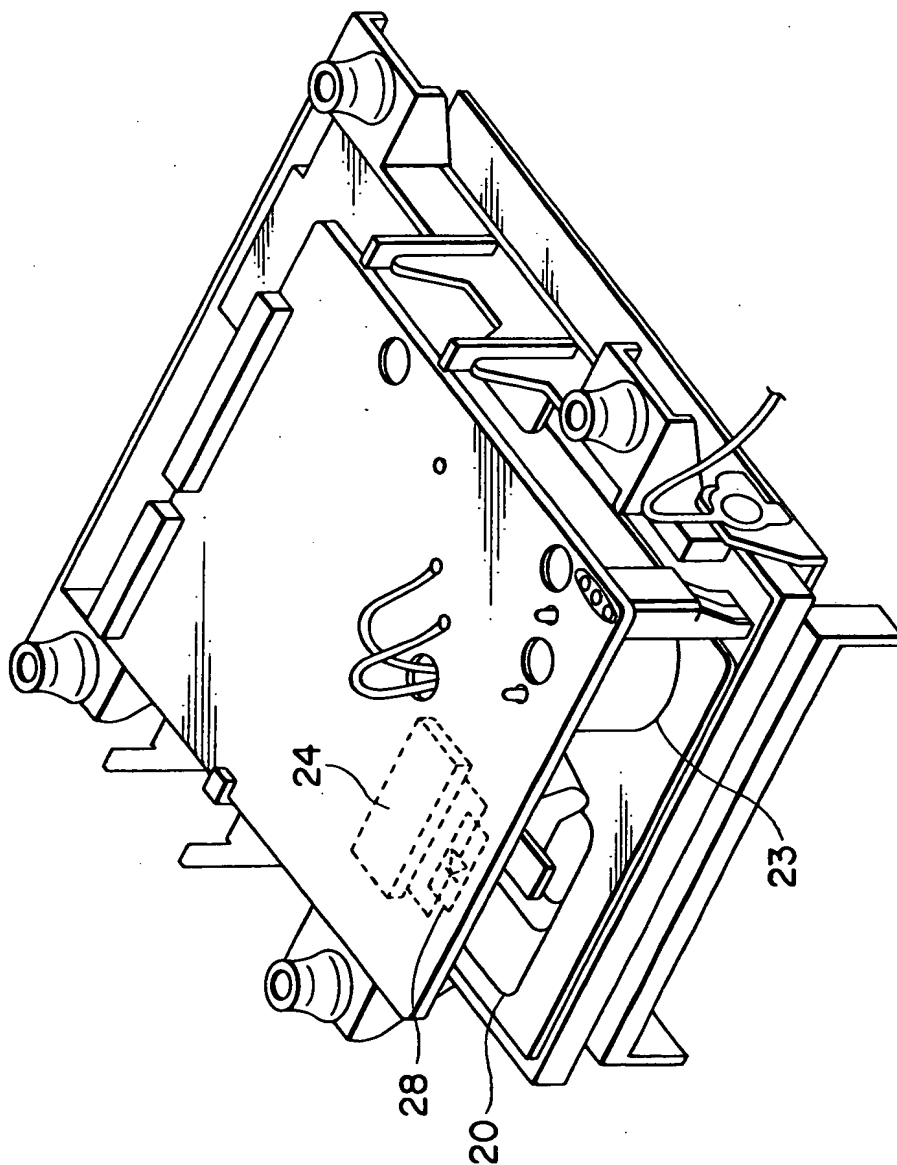


FIG. 2 OF 50642650

FIG. 3

ADDRESS

00	TEMPERATURE 25°C SETTING
01	LASER POWER SETTING
05	SERVO SETTING
11	SERVO PARAMETER
15	LASER CURRENT-VOLTAGE CONVERSION VALUE SETTING
16	RESERVED
20	SERVO PARAMETER
2C	RESERVED
30	SERVO PARAMETER
62	RESERVED
68	SERVO PARAMETER
A1	RESERVED
A6	SERVO PARAMETER
B0	FREE AREA

	FREE AREA
D6	LASER CURRENT ADJUST VALUE SETTING
D9	ACCUMULATED TIME
DD	CONTENTS CONTROL DATA AREA
F7	IEEE1394 AREA
FF	

FIG. 3

FIG. 4

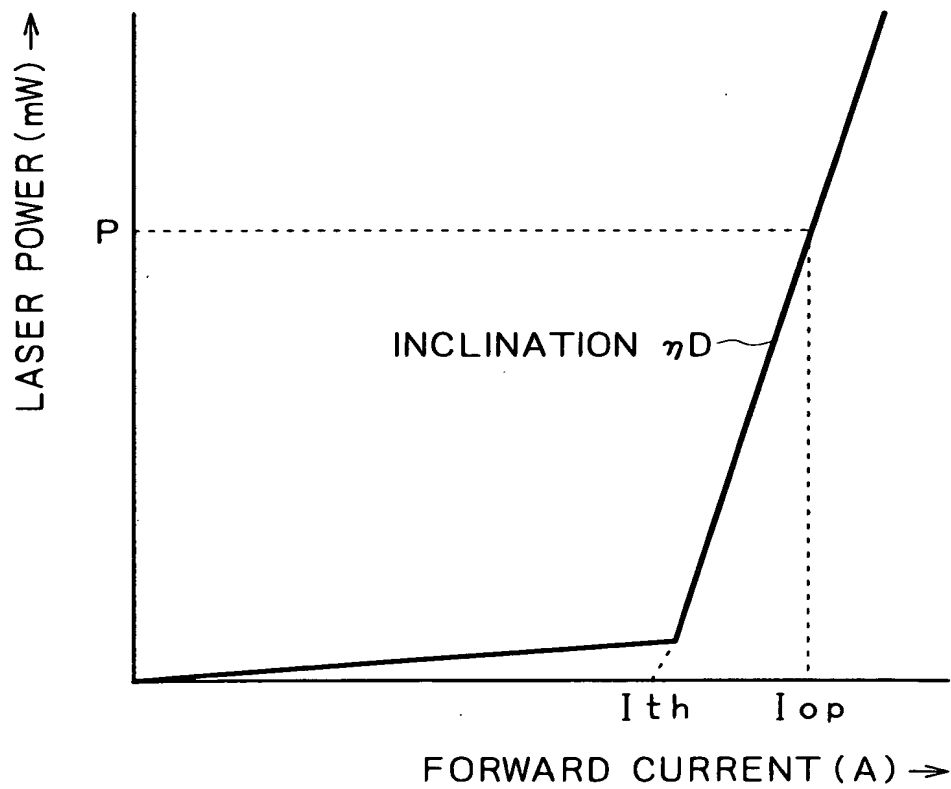
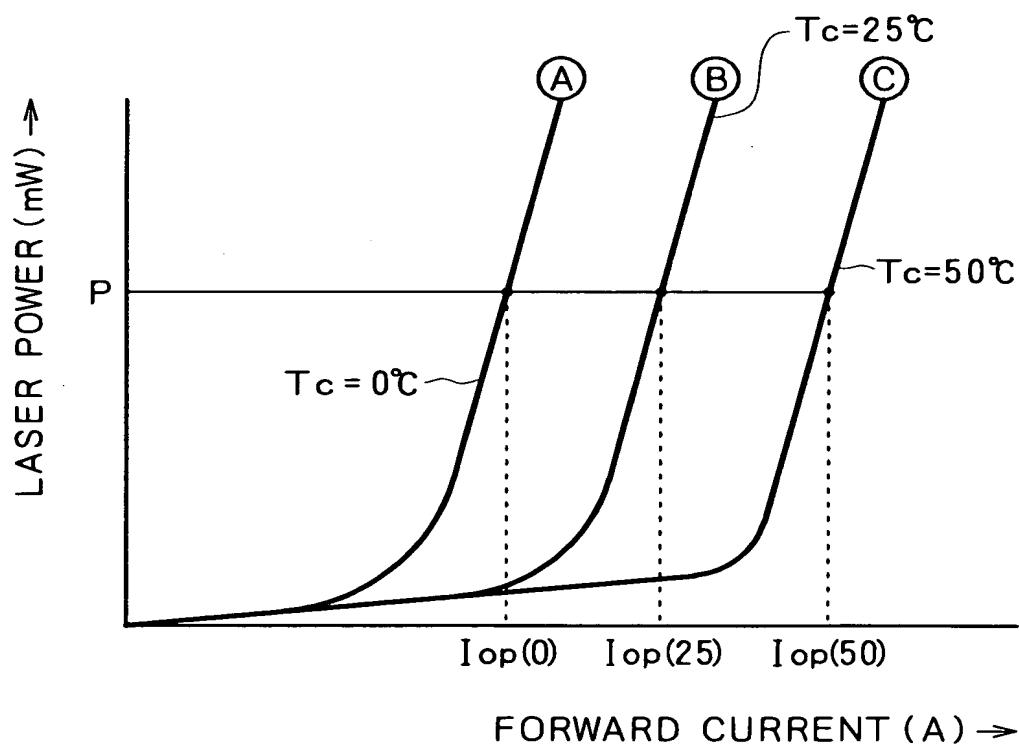


FIG. 5



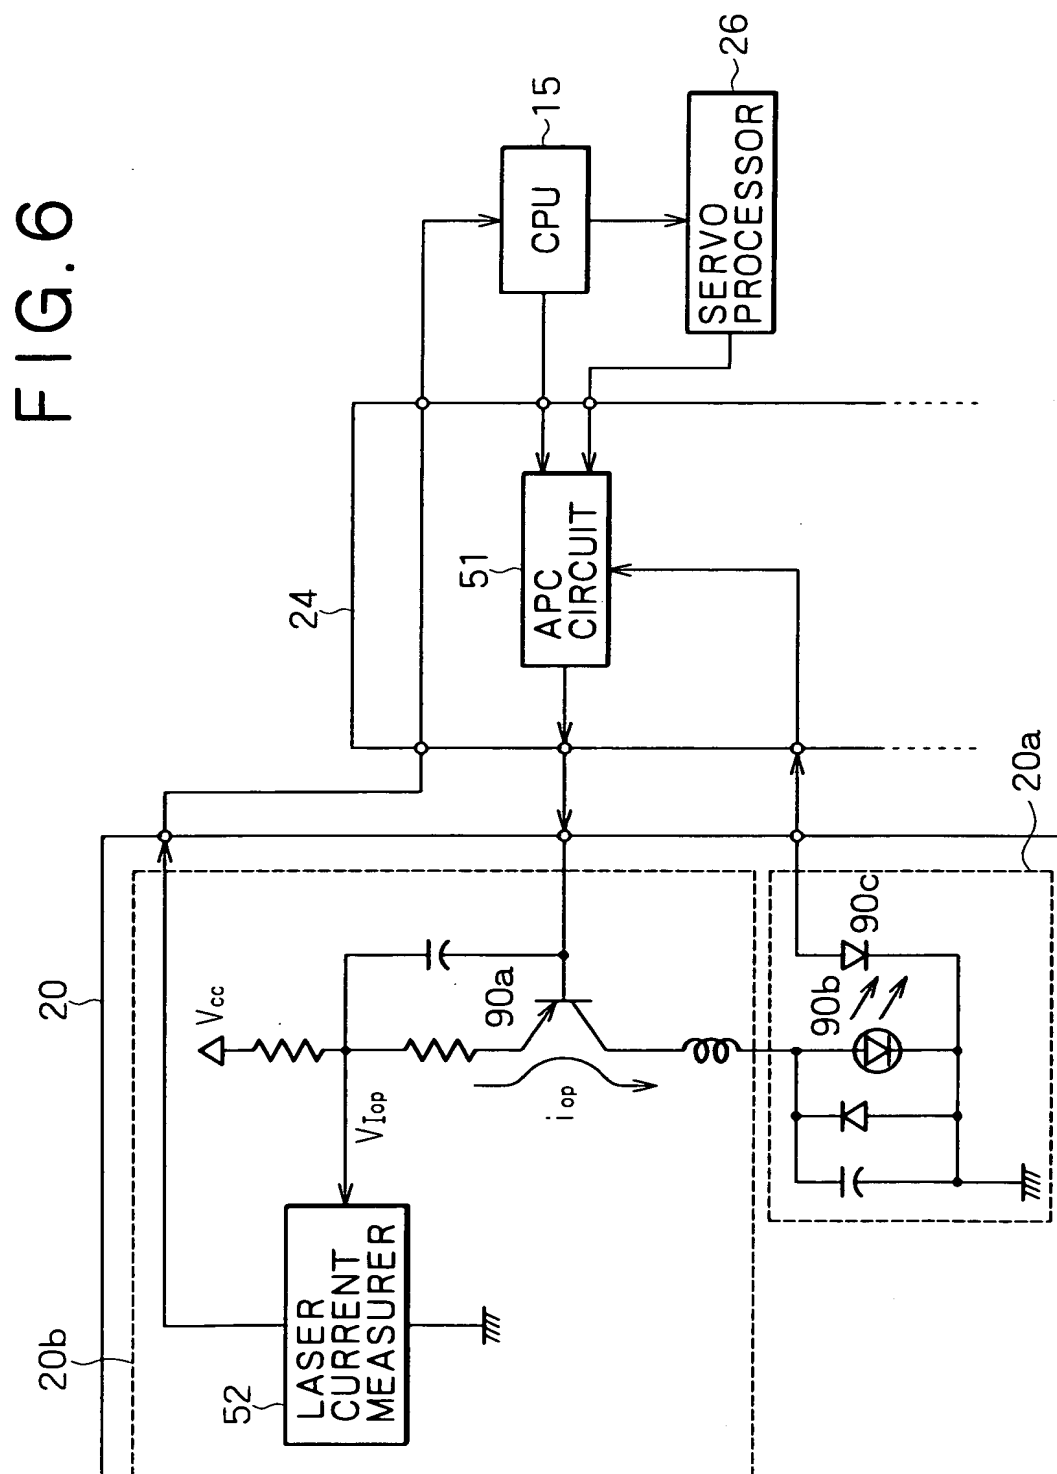


FIG. 7A

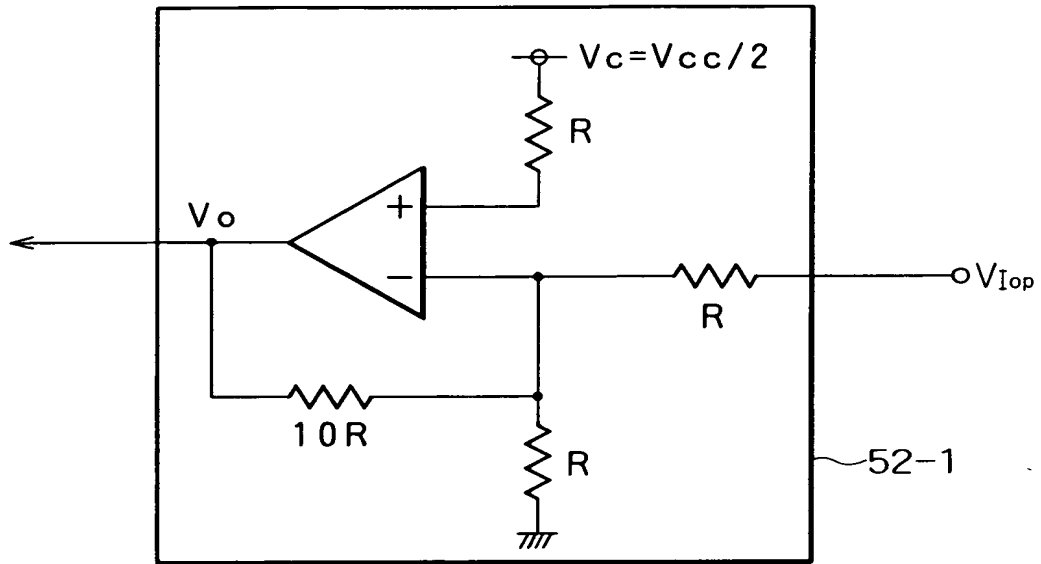


FIG. 7B

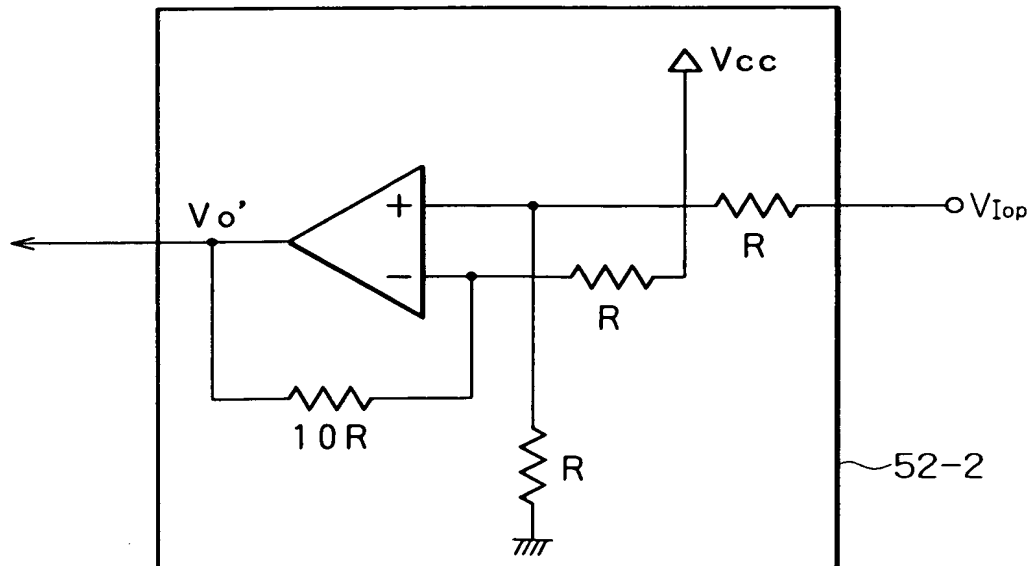


FIG. 8

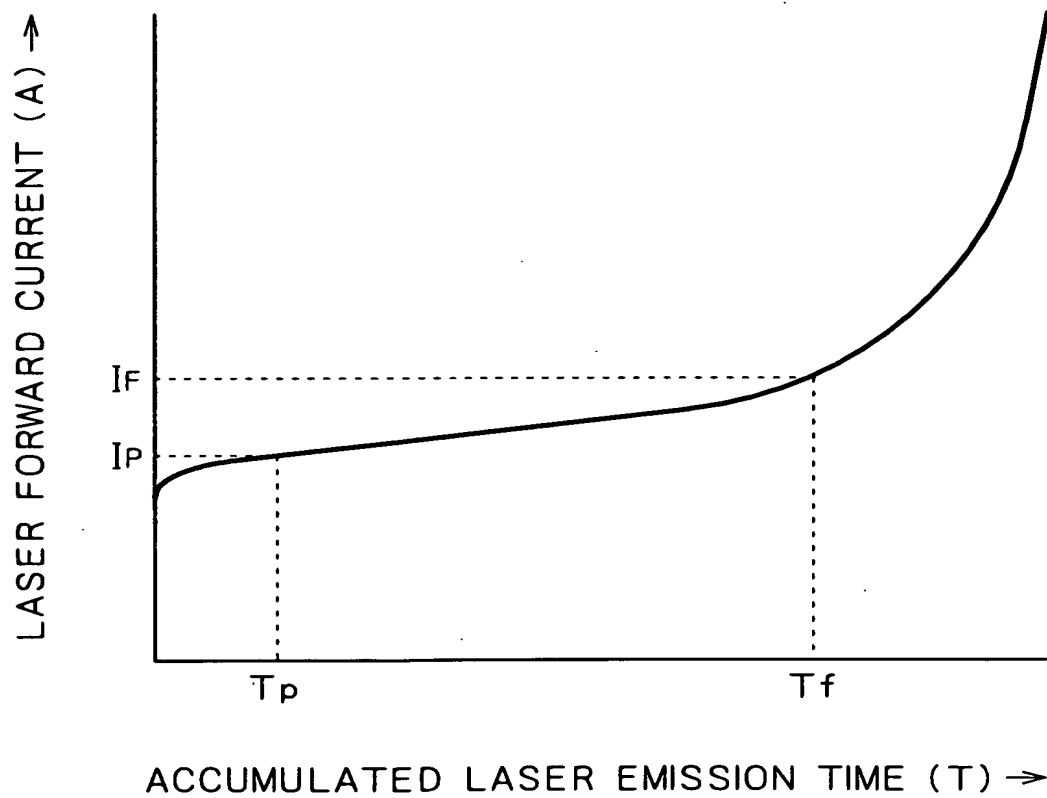


FIG. 9

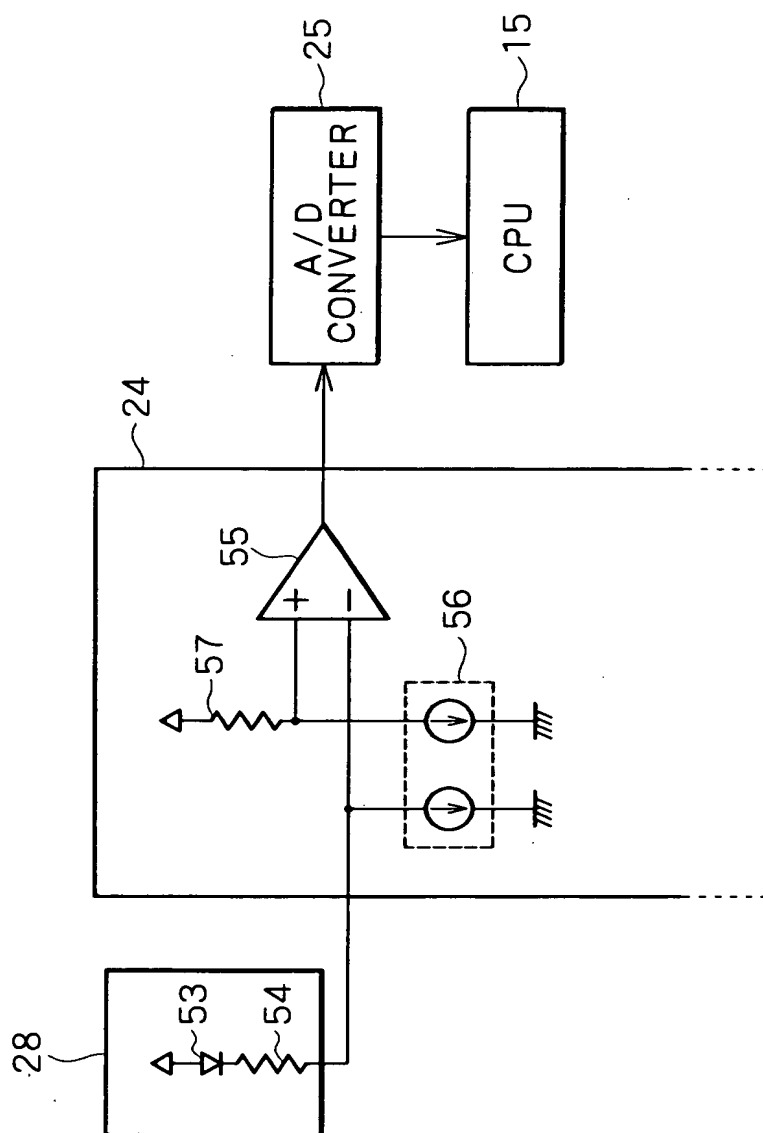


FIG. 10

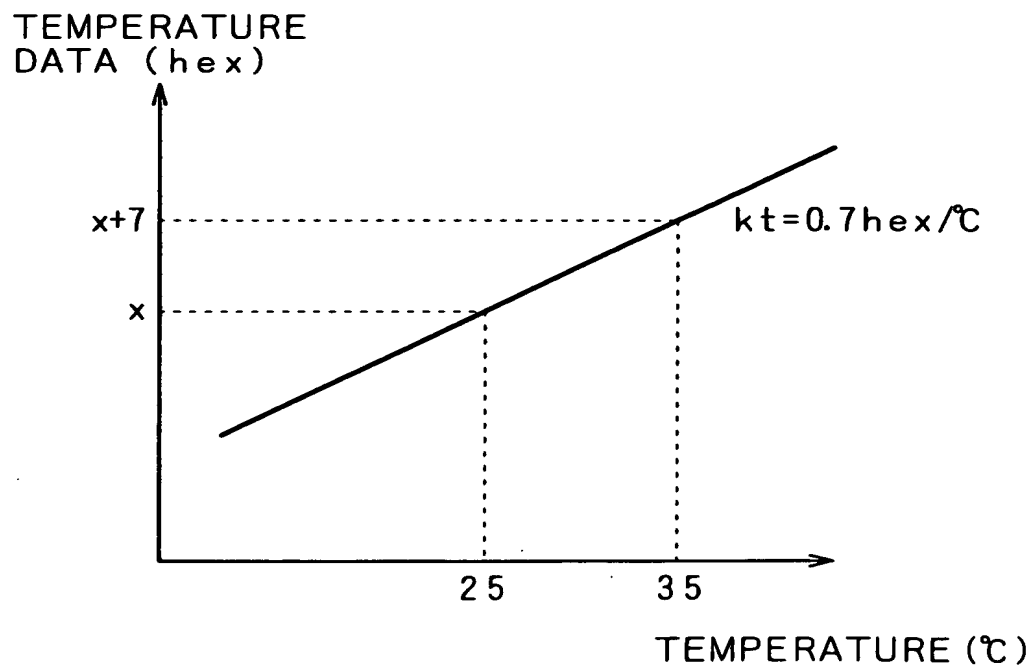


FIG. 11

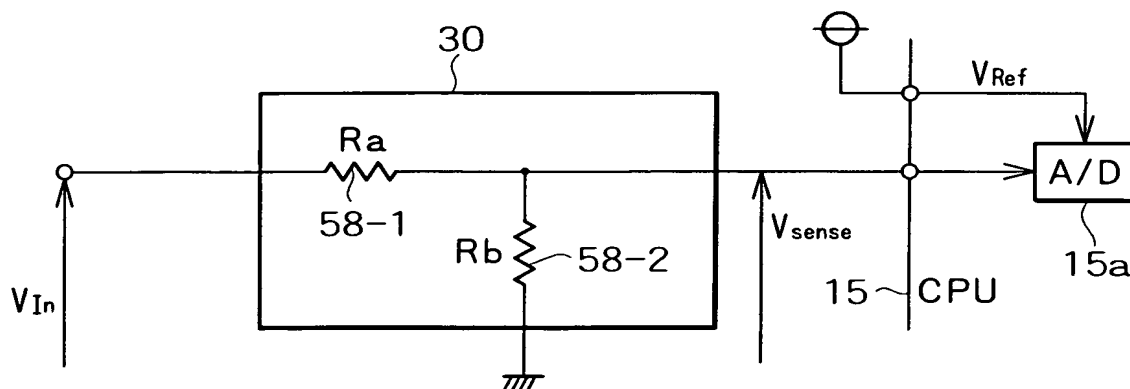


FIG. 12

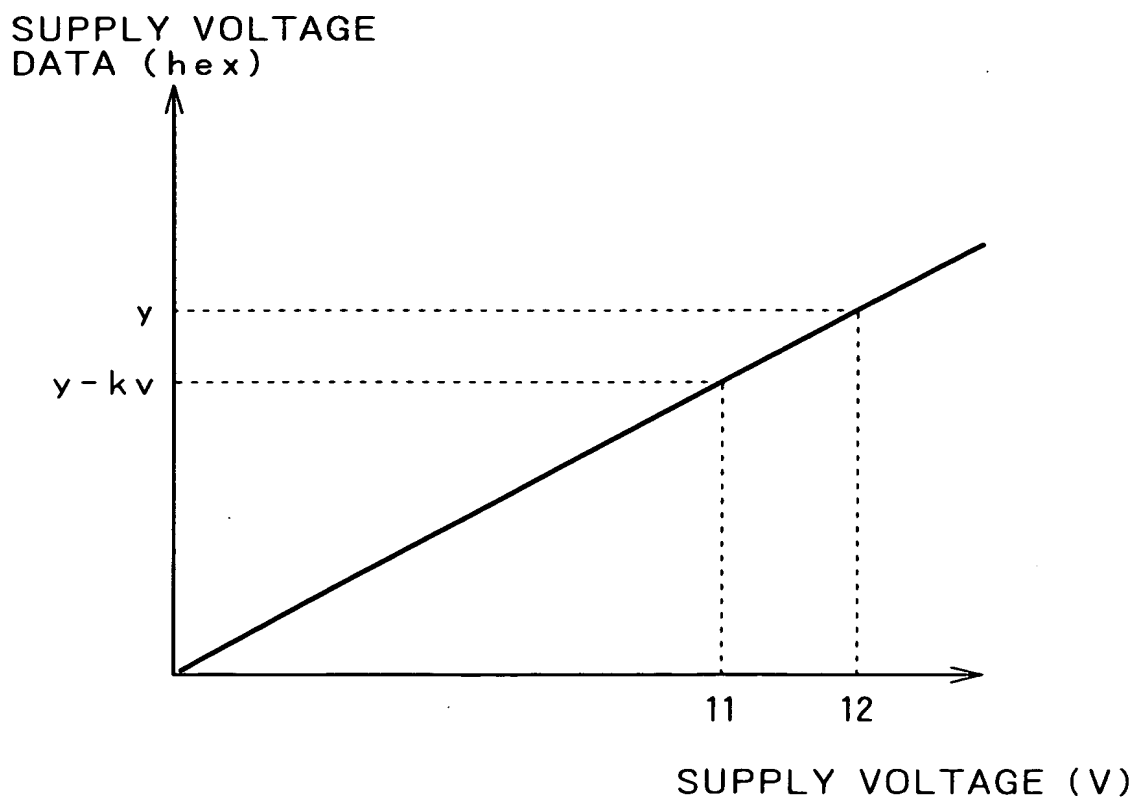


FIG. 13

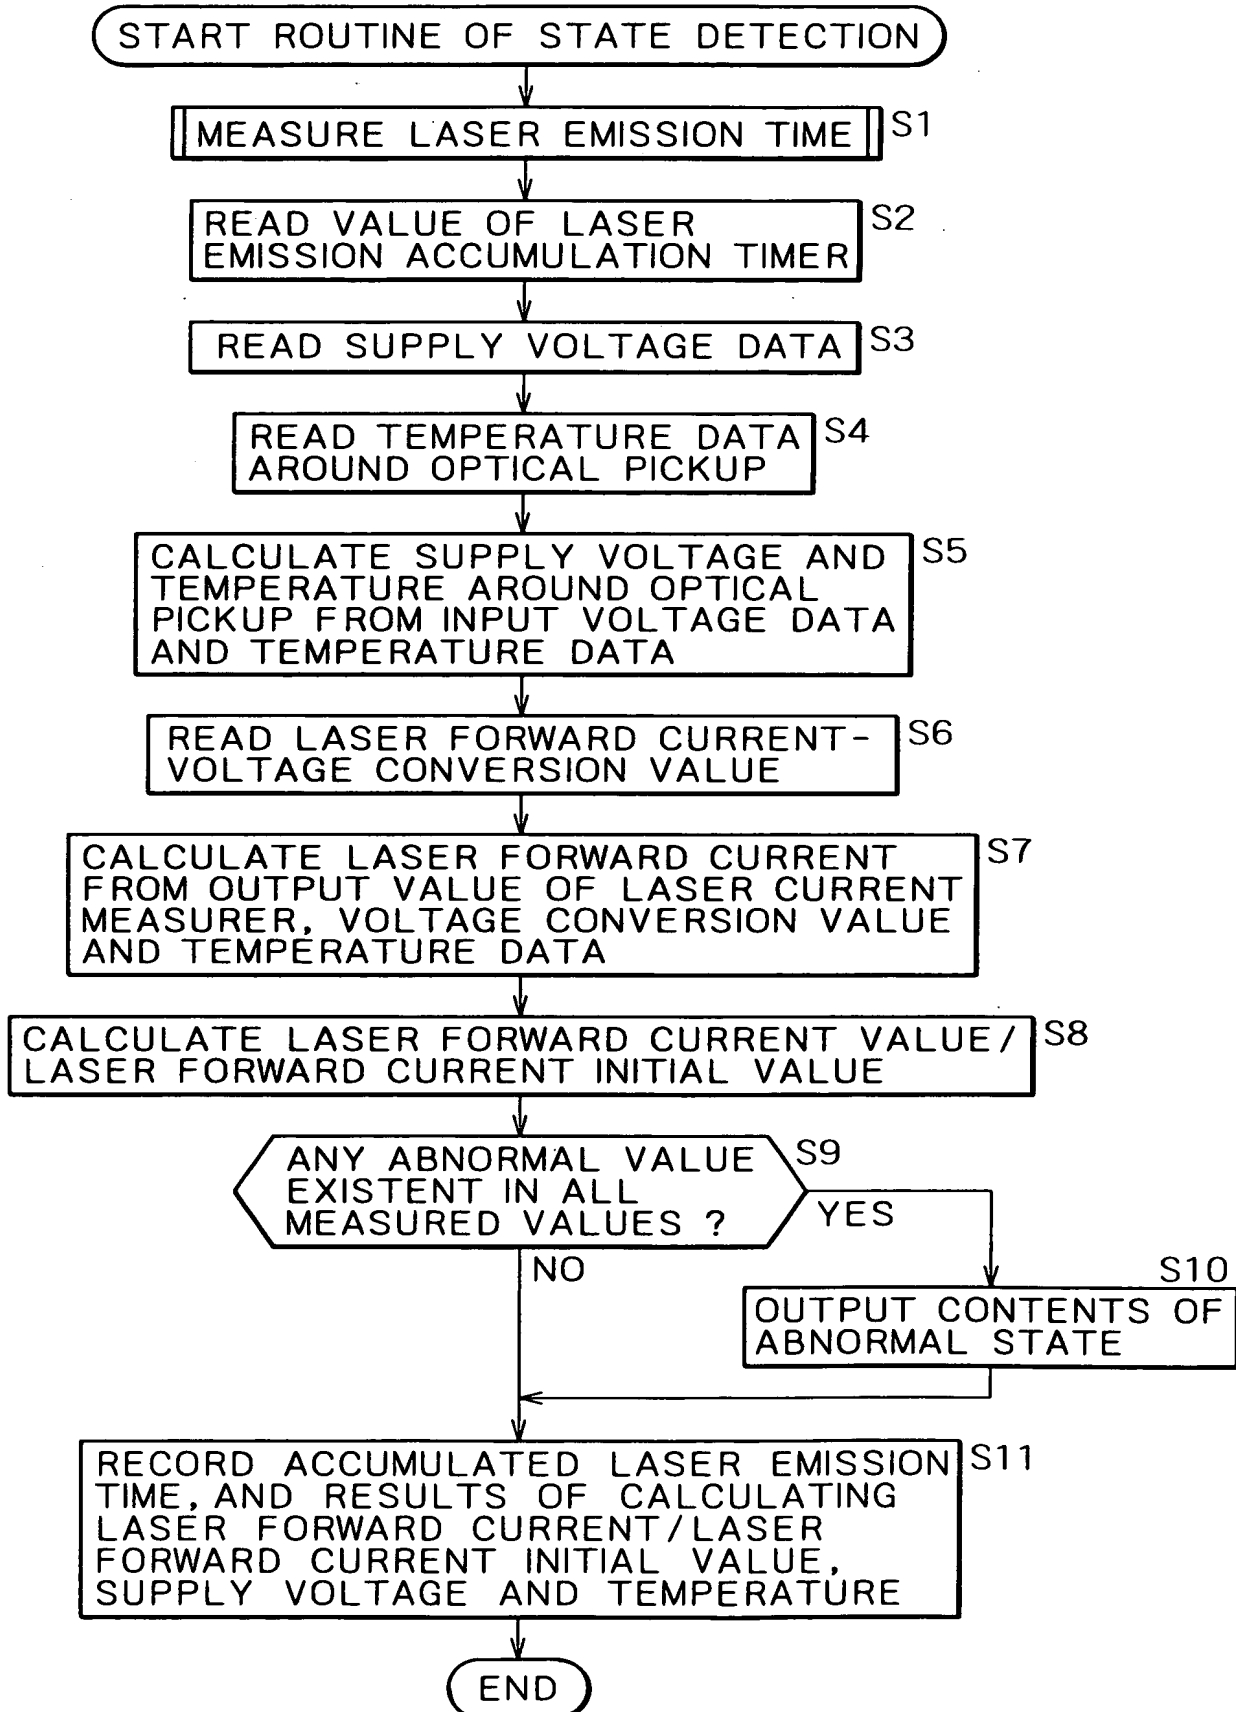


FIG. 13

FIG. 14

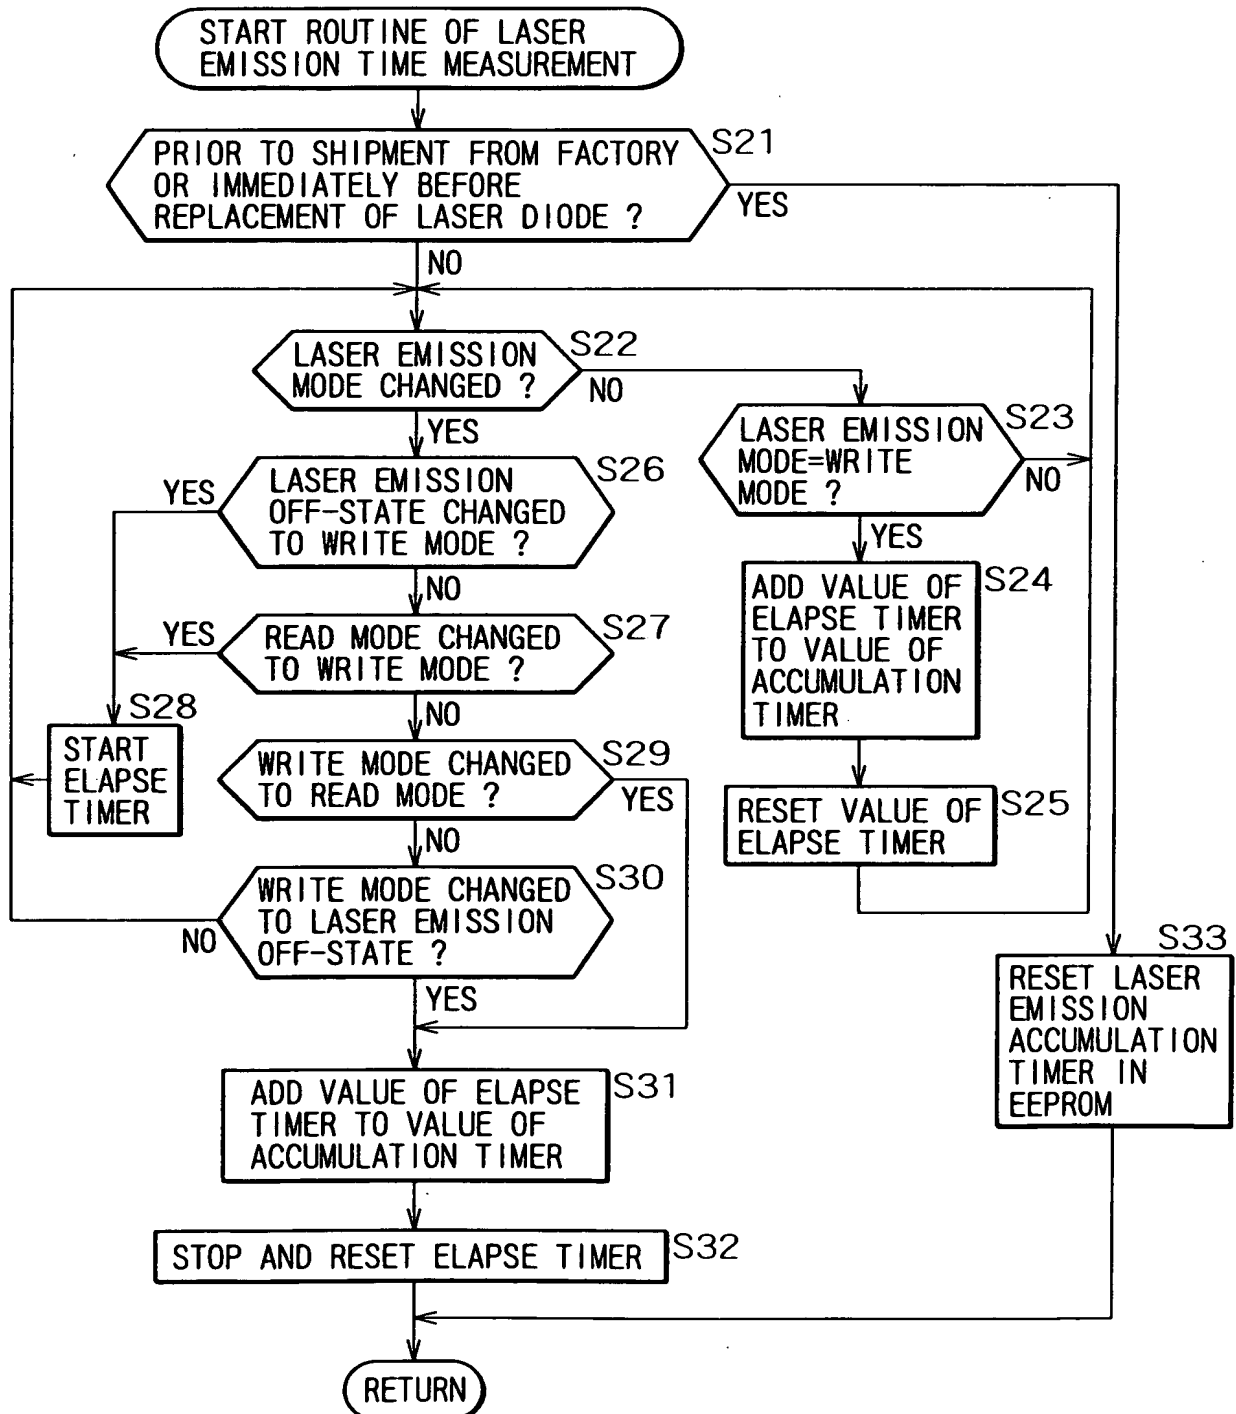


FIG. 15

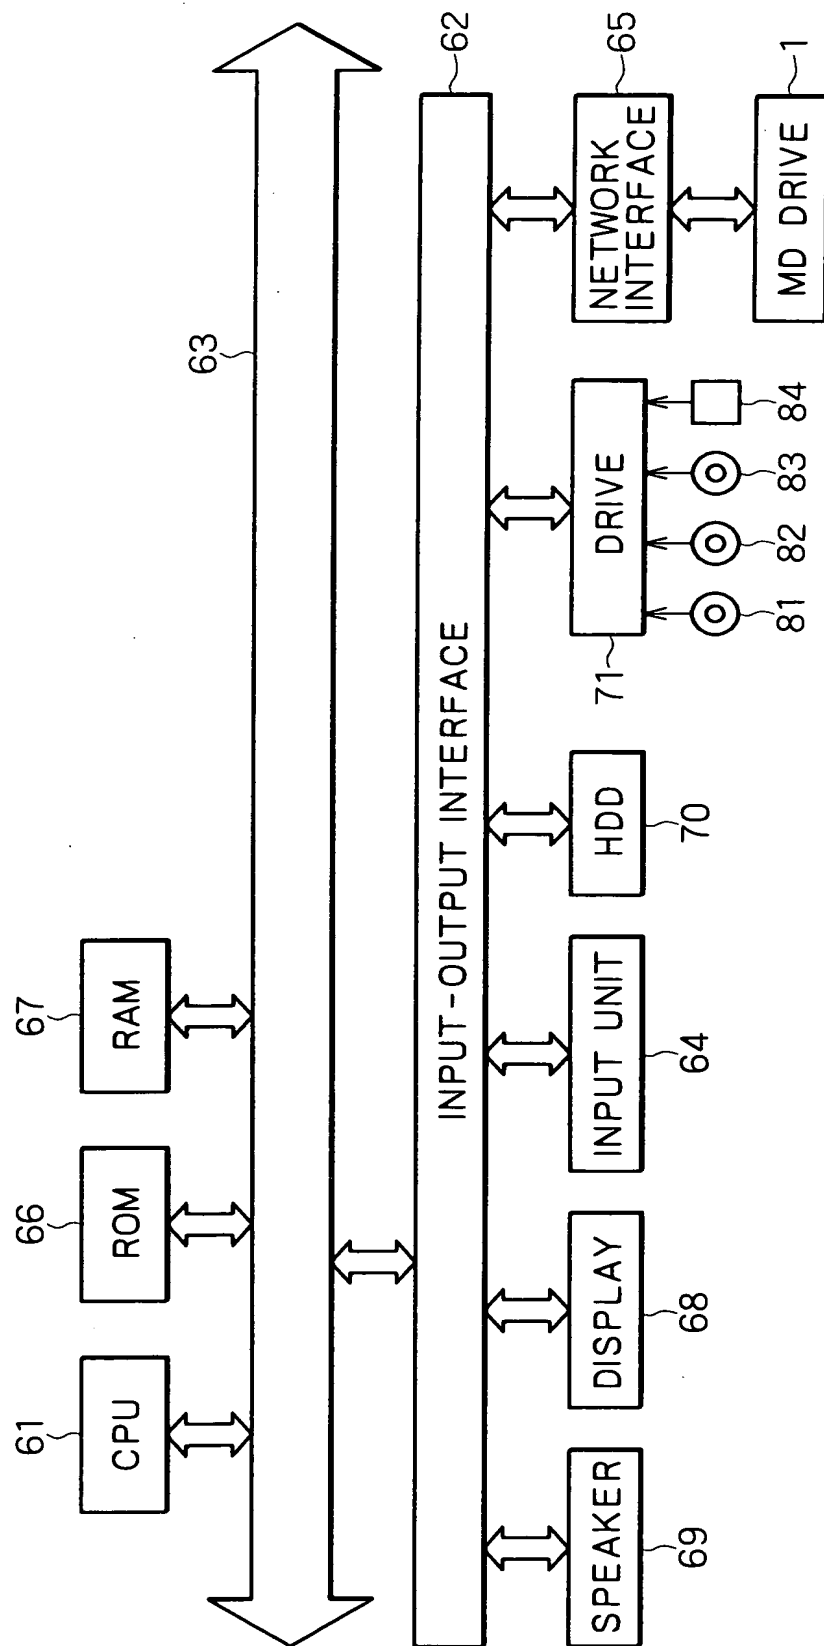


FIG. 16

PROCESSING IN MD DRIVE

PROCESSING IN
PERSONAL COMPUTER

